HOW TO FIT GENiEGRiPS® CAPS

STEP 1:

Raise Forktynes

SAFELY raise forktynes to waist height.

Ensure Caps are correct way up, with the metal surface at the top.

STEP 2:

Insert Caps

Approach tyne at 90 degree angle and slot the Caps on to the tip of forktynes. Firmly push them on to tyne – use rubber mallet if needed, to ensure the tip of the tyne touches inside back cap.

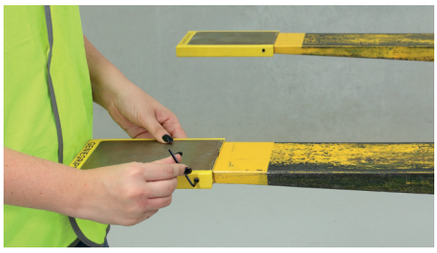

STEP 3:

Adjust Screws

Once firmly on tyne, tighten each grub screw to allow it to touch the tyne.

STEP 4:

Tighten Screws

Once screws are in place, then firmly re tighten each side for a secure fit. Ensure Cap is aligned with tyne.

STEP 5:

During Use

Caps are now ready for use.

Important: When using the GenieGrips® Caps, licenced forklift drivers must enter the pallet at a 90 degree angle and allow sufficient clearance above and below tyne when entering/ exiting to ensure Cap installation is not compromised.

STEP 6:

Removal and Storage

To remove, simply untighten the grub screws and pull Cap off the tyne.

Store Caps in protective drawsting bag provided.

ALWAYS:

- Ensure GenieGrips® Caps are kept clean and free of contamination (eg grease, oil, paint, etc)
- Ensure forklift truck is only operated by licensed/trained personnel and in accordance with manufacturer's safe operating procedures.

IMPORTANT:

Frequently check that the grub screws remain tight at all times during use of Caps.